PROPERTY ADDRESS

2103 Bison Ln, Johnsburg, IL 60051, USA

CUSTOMER: **Bxx Gxxxxxx** PHONE: **+1 416-xxx-xxxx** EMAIL: **xxxxxx@gmail.com**

ORDER #: **TR261006xxxx** ORDERED BY: **Bxx Gxxxxxx**

GUTTER REPORT

GUTTER OVERVIEW & TAKEOFF

GUTTER PLAN

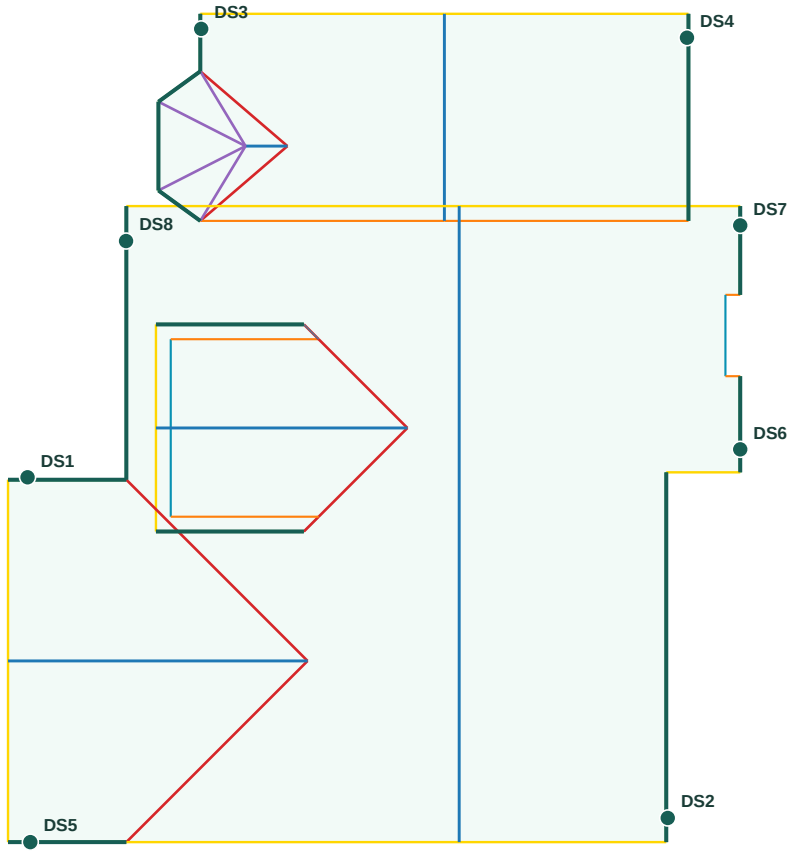

GUTTER TAKEOFF SUMMARY

Item	Quantity
Eave / Gutter	122.9 LF
Sections (12 ft)	15 pcs
Inside Corners	2 pcs
Outside Corners	2 pcs
End Caps	18 pcs
Miters	4 pcs
Downspouts	8 pcs
DS Total	100 LF
DS Sections (10 ft)	11 pcs
Elbows	24 pcs
Splash Blocks	8 pcs
Leaf Guard	122.9 LF
Hangers K-Style	65 pcs
Hangers Half-Round	46 pcs
Hangers Box	65 pcs

EAVE / GUTTER	GUTTER RUNS	DOWNSPOUTS	DS TOTAL
122.9 LF	8	8	100 LF

(c) 2026 tierroof.com - All rights reserved.

GUTTER REPORT

DOWNSPOUT & LENGTH PLAN

GUTTER LENGTHS & DOWNSPOUTS

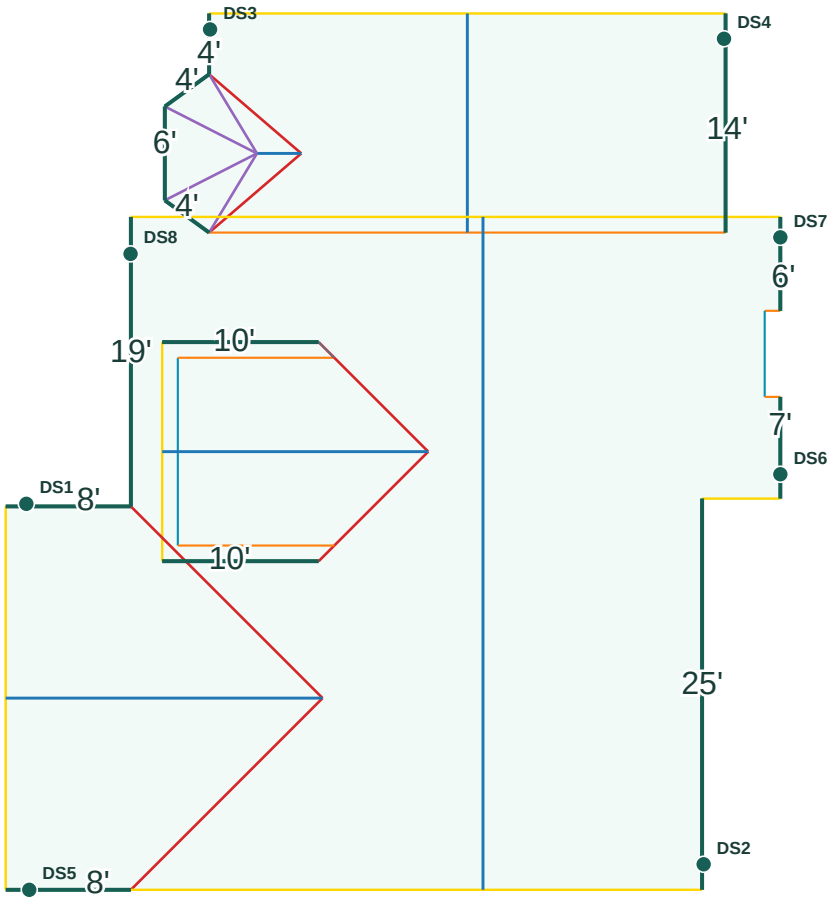

Downspout locations are editable suggestions based on 40 LF spacing. Confirm drainage direction, sizing and site conditions.

(c) 2026 tierroof.com - All rights reserved.

GUTTER RUNS

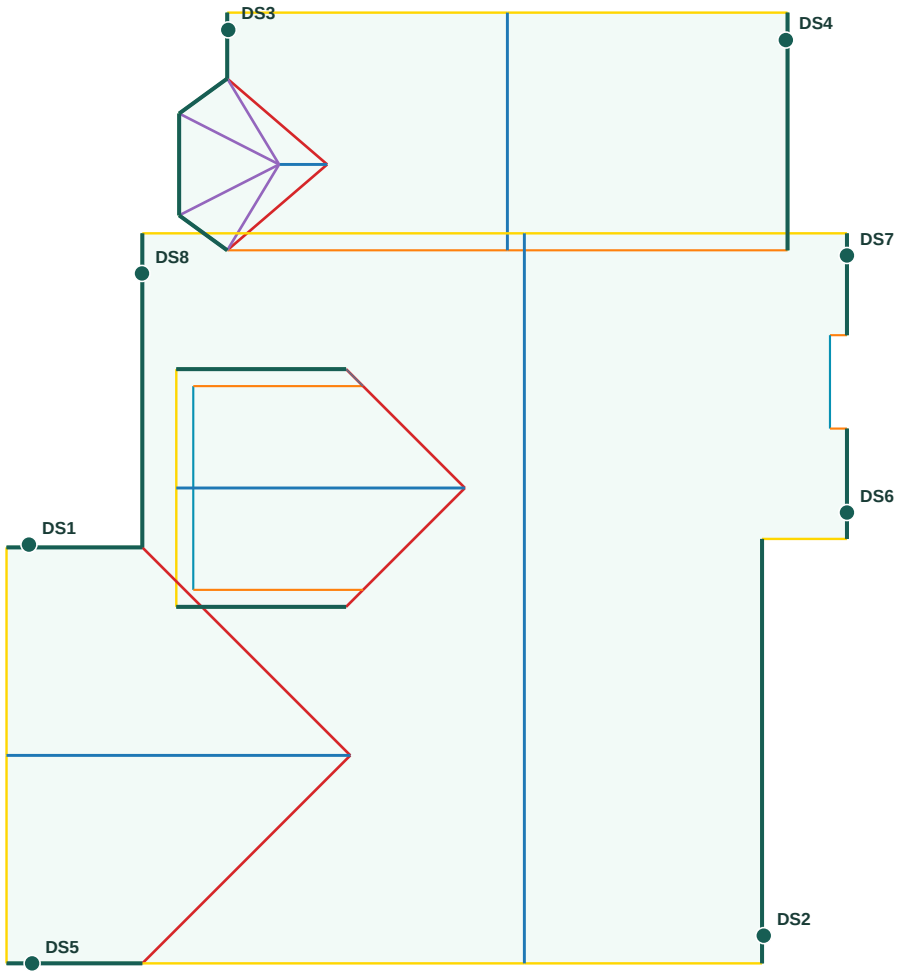

DOWNSPOUT HEIGHTS

Downspout	Height
DS1	10 feet
DS2	18 feet
DS3	10 feet
DS4	10 feet
DS5	10 feet
DS6	16 feet
DS7	16 feet
DS8	10 feet

(c) 2026 tierroof.com - All rights reserved.

NORTH PROPERTY VIEW



EAST PROPERTY VIEW



SOUTH PROPERTY VIEW



WEST PROPERTY VIEW



(c) 2026 tierroof.com - All rights reserved.